



DOOR KITS FOR DB's / SERVICE CENTRE

FITTING INSTRUCTIONS

SHEET 1 OF 1

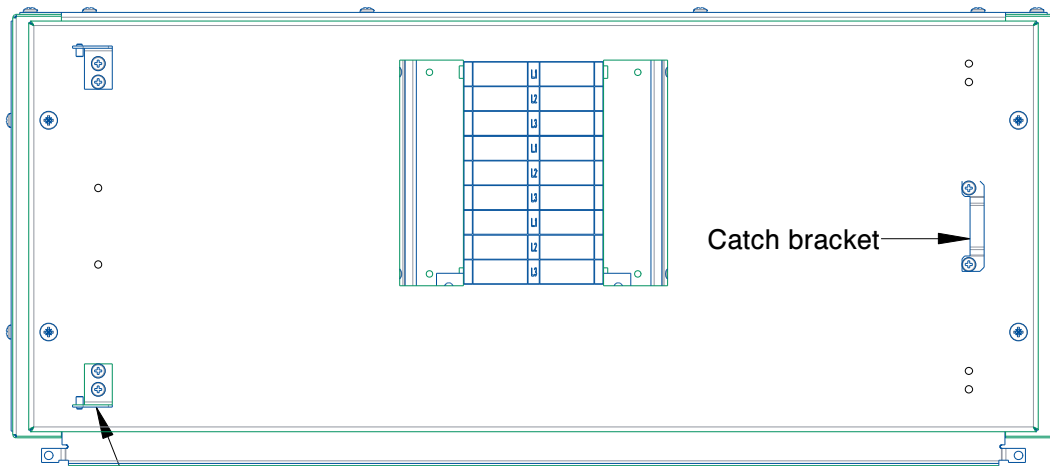

Fit bottom hinge bracket first
(note orientation)

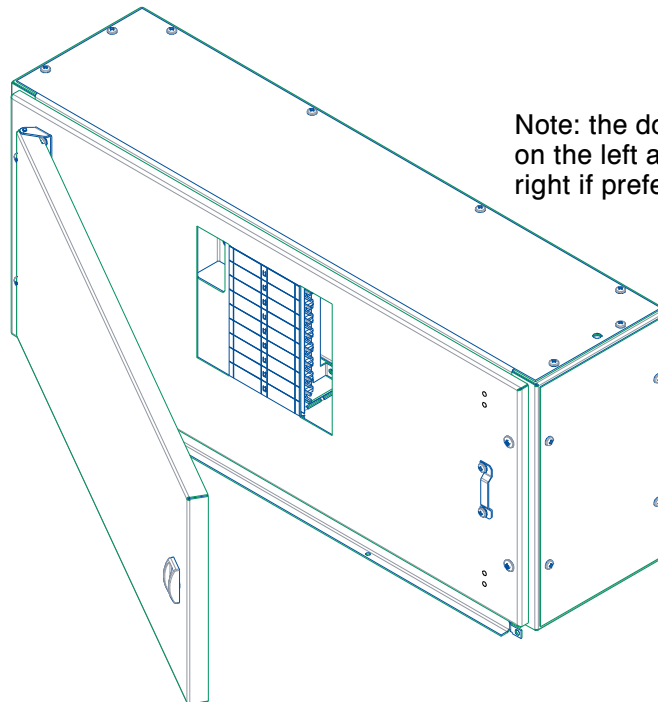

Note: the door can be hinged
on the left as shown or hinged on the
right if preferred.

- 1) Remove the front plate from the unit.
- 2) Locate and knockout the 6 knockouts in the front plate.
- 3) Fit the catch bracket as shown above using M5 nuts, bolts and washers supplied taking note of the orientation of the bracket.
- 4) Fit the bottom hinge to the plate on one side using the M5 fasteners, again noting the orientation of the bracket with the hinge pin biased towards the edge of the panel.
- 5) Fit the door onto the lower hinge pin, locate the top hinge bracket onto the door and fasten the top hinge to the front plate with the M5 fasteners thus securing the door. NOTE: the top and bottom hinge assemblies are opposite handed.
- 6) Fit the cover catch moulding through the hole in the door and turn to keep the door closed.
- 7) Refit the front plate and door assembly to the unit.

Installation and operation must be in accordance with published data, instructions and diagrams
and any relevant national and local regulations