




sifam tinsley
PRECISION INSTRUMENTATION

DIN RAIL MULTIFUNCTION POWER METER
(MID CERTIFIED)
AP25-1DO
www.sifamtinsley.co.uk



**NEW
PRODUCT**

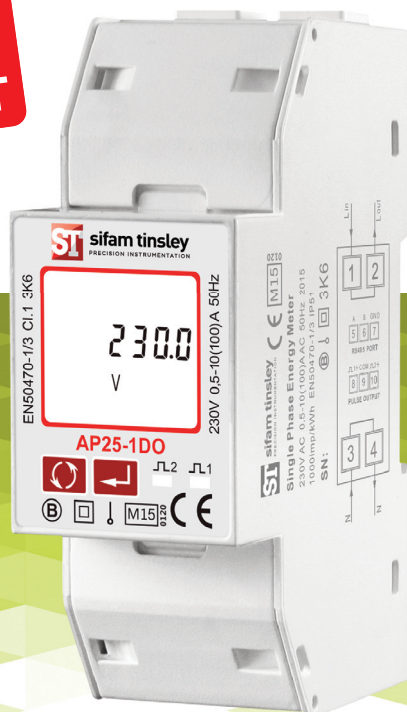

Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

Insulation Testers

AP25-1DO

DIN RAIL MULTIFUNCTION POWER METER (MID CERTIFIED)

User Manual - Issue 3.0


SUBJECT TO CHANGE WITHOUT NOTICE

This manual superseded all previous versions – please keep for future reference

**NEW
PRODUCT**

Features

- MID B+D Certified
- Class B (kWh) EC Directive 2004/22/EC
- Certificate Number 0120/SGS0198
- Multifunction 100A Direct Connected
- Built In Pulsed & RS485 Modbus Outputs

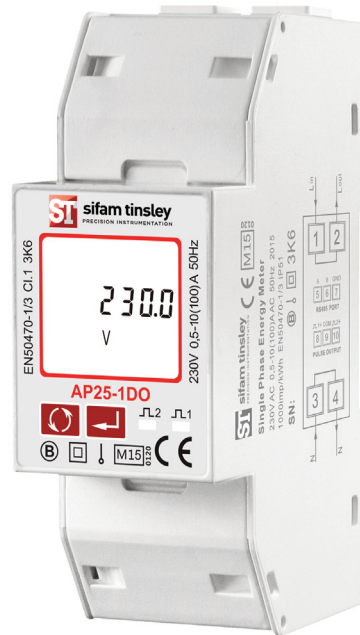

Sifam Tinsleys AP25-1DO is a new generation modern design power monitor that will measure and display electrical power quality parameters. It has been engineered to cover most applications (Single Phase networks / Built in Pulse and RS485 Modbus / Import and Export kWh), replacing the need for several different models of this power meter.

As the demand for MID certified meters has increased, we have obtained annex B and D of the EC Directive 2004/22/EC. This power meter has been tested and certified for single phase networks and import and export active energy (kWh).

The AP25-1DO is produced to the highest quality and utilizes the latest microprocessor and technology. It has a blue backlit display and 16 different measuring parameters. With built in pulsed outputs and RS485 Modbus RTU it is fully compatible for integration with BMS and remote monitoring systems.

1. Parameters

- Phase to Neutral voltage
- Frequency
- Current Max Demand
- kW,kVA & • kVAr
- Power Max Demand
- Power Factor
- Import kWh
- Export kWh
- Import kVarh
- Export kVarh
- Total kWh (Active Energy)
- Total kVarh (Reactive Energy)
- Hours Run

2. Specifications

Measured Parameters

The unit can monitor and display the following parameters of a single phase two wire (1p2w) system.

Voltage and Current

- Phase to neutral voltages 176 to 276V a.c.
- I_{min}-I_{ref} (Max) 0.5-10(100A)

This meter is certified and tested at class 1 (Accurate to within $\pm 1\%$). If the meter has a load smaller than the I_{min} (minimum current) we cannot guarantee class 1 accuracy.

Power factor and Frequency and Max. Demand

- Frequency in Hz
- Instantaneous power:
- Power 0 to 3600 MW
- Reactive power 0 to 3600 MVA
- Volt-amps 0 to 3600 MVA
- Maximum demanded power since last Demand reset Power factor

Energy Measurements

| | |
|-----------------------------------|--------------------|
| Imported/Exported active energy | 0 to 99999.99 kWh |
| Imported/Exported reactive energy | 0 to 99999.99 kVAh |
| Total active energy | 0 to 99999.99 kWh |
| Total reactive energy | 0 to 99999.99 kVAh |

Measured Inputs

Voltage inputs through 2 way fixed connectors with 35mm² maximum stranded wire capacity.

| | |
|------------------------------|--------------------|
| Nominal Voltage Input | (Ph+N) 176 to 276V |
| Max Continuous Voltage | 120% of nominal |
| Nominal Input Current | 0.5-10(100)A |
| Max Continuous Current | 120% of nominal |
| Nominal Input Current Burden | 0.5VA |
| Frequency | 50Hz($\pm 10\%$) |

Accuracy

| | |
|------------------------|----------------------------|
| Voltage | 0.5% of range maximum |
| Current | 0.5% of nominal |
| Frequency | 0.2% of mid-frequency |
| Power factor | 1% of unity (0.01) |
| Active power (W) | $\pm 1\%$ of range maximum |
| Reactive power (VAr) | $\pm 1\%$ of range maximum |
| Apparent power (VA) | $\pm 1\%$ of range maximum |
| Active energy (Wh) | Class 1 IEC 62053-21 |
| Reactive energy (VARh) | $\pm 1\%$ of range maximum |

Interfaces for External Monitoring

Two interfaces are provided:

- RS485 communication channel that can be programmed for Modbus RTU protocol
- Relay output indicating real-time measured energy.(configurable)

The Modbus configuration (baud rate etc.) and the pulse relay output assignments (kW/kVAh, import/export etc.) are configured through the set-up screens

Pulse Output

The meter provides two pulsed outputs, both pulsed outputs are passive type. The first pulsed output is configurable. The pulsed output can be set to read total / import / export/ kWh /kVarh. The pulse constant can be set to generate 1 pulse per: 0.001(default) /0.01/0.1/kWh/kVarh. The second pulsed output is non-configurable. It is fixed to read total kWh.

Rate can be set to generate 1 pulse per:

0.001 = 1 Wh/VArh (default)

0.01 = 10 Wh/VArh

0.1 = 100 Wh/VArh

1 = 1 kWh/kVArh

Pulse width 200/100/60 ms.

RS485 Output for Modbus RTU

For Modbus RTU, the following RS485 communication parameters can be configured from the set-up menu:

Baud rate 1200, 2400, 4800, 9600.

Parity none (default) / odd / even

Stop bits 1 or 2

RS485 network address 3-digit number, 1 to 247

Reference Conditions of Influence Quantities

Influence Quantities are variables that affect measurement errors to a minor degree. Accuracy is verified under nominal value (within the specified tolerance) of these conditions.

| | |
|-----------------------------------|--|
| Ambient temperature | 23°C ±1°C |
| Input waveform | 50Hz ±2% |
| Input waveform | Sinusoidal (distortion factor < 0.005) |
| Auxiliary supply voltage | Nominal ±1% |
| Auxiliary supply frequency | Nominal ±1% |
| Auxiliary supply waveform (if AC) | Sinusoidal (distortion factor < 0.05) |
| Magnetic field of external origin | Terrestrial flux |

Environment


| | |
|-----------------------|---------------------------------|
| Operating temperature | -25°C to +55°C* |
| Storage temperature | -40°C to +70°C* |
| Relative humidity | 0 to 95%, non-condensing |
| Altitude | Up to 3000m |
| Warm up time | 1 minute |
| Vibration | 10Hz to 50Hz, IEC 60068-2-6, 2g |
| Shock | 30g in 3 planes |

*Maximum operating and storage temperatures are in the context of typical daily and seasonal variation.


Mechanics

| | |
|---------------------|---|
| DIN rail dimensions | mm x mm (WxH) per DIN 43880 |
| Mounting | DIN rail (DIN 43880) |
| Sealing | IP51 indoor |
| Material | Self-extinguishing UL 94 V-0Energy Measurements |

3. Dimensions

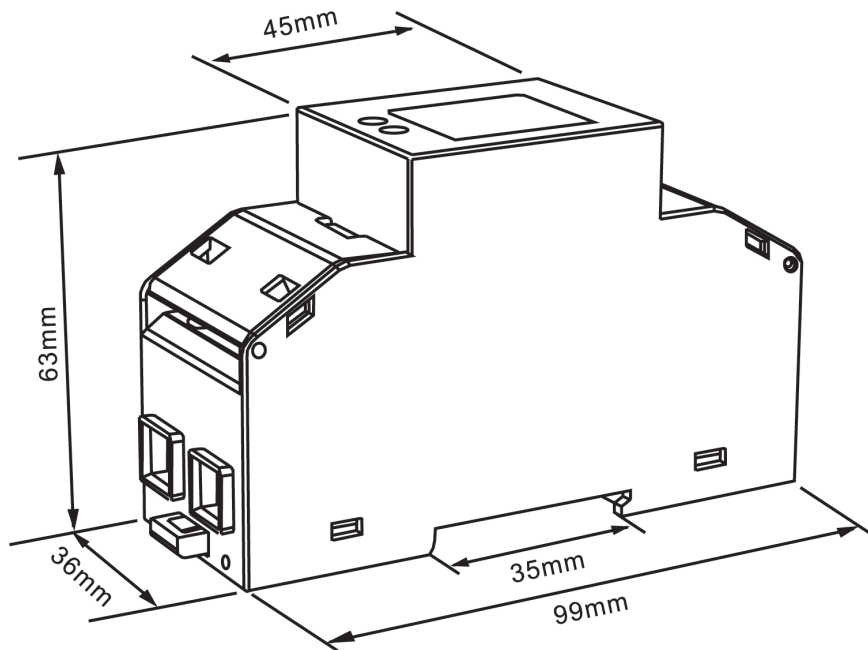

4. Installation

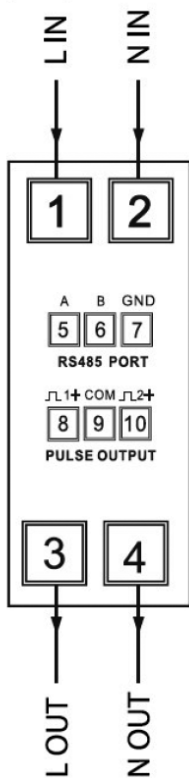

Contact



Sifam Tinsley Instrumentation Ltd

1 Warner Drive
Springwood Industrial Estate
Braintree, Essex
CM7 2YW

Tel: 01376 335271
E-mail: sales@sifamtinsley.com

www.sifamtinsley.co.uk