


LOADBANK MCB BOARDS & SERVICE CENTRES

Main Features

- IP3X as standard and IP4X with doors fitted
- For use with Loadlimiter 63 range of MCBs and RCBOs
- MCB Distribution boards have fully shielded busbars and interconnections
- Space saving twin option TP&N Distribution board option

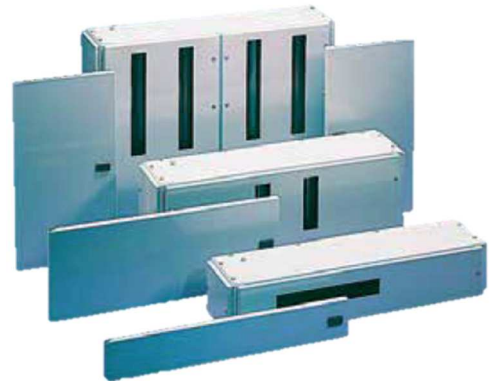

CATALOGUE NUMBERS


| Description | Modular Height | Board Product Code | Door Kit Product Code |
|-------------------------------|----------------|--------------------|-----------------------|
| 6 Way TP&N Dist Board | 2 | LDT106X | LD1D06X |
| 12 Way TP&N Dist Board | 3 | LDT112X | LD1D12X |
| 2 X 12 Way TP&N Dist Board | 4 | LDT212X* | LD2D12X |
| 24 Way Modular Service Centre | 1 | LDS24 | LD1DS |

*Single pole RCBOs can not be used in this enclosure. Use double pole if required.

Technical data

| | |
|-----------------------------|--|
| Enclosure mounting | Surface |
| External IP Rating | IP3X as standard; IP4X with optional door |
| Busbar Current Rating | 250A |
| Busbar short circuit rating | 10kA for 250mS |
| Construction Outer | Painted 1.2/1.6mm thick zinc plated sheet steel. |
| Construction Inner | Painted 1.2 (min) thick zinc plated sheet steel & 1.2mm (min) thick aluminium-zinc coated sheet steel. |
| Busbar material | Copper bar to BS EN 13601, CW004A - R250 |
| Busbar support material | Flame retardant, glass filled Nylon |
| Paint | Polyester powder coat, low smoke/fume, depth 40/120 microns colour RAL7035 |

| Cat. No. | Height A (mm) | Fixings B (mm) | Weight (kg) |
|----------|---------------|----------------|-------------|
| LDT106X | 305 | 152 | 23 |
| LDT112X | 457 | 305 | 30 |
| LDT212X | 609 | 457 | 35 |

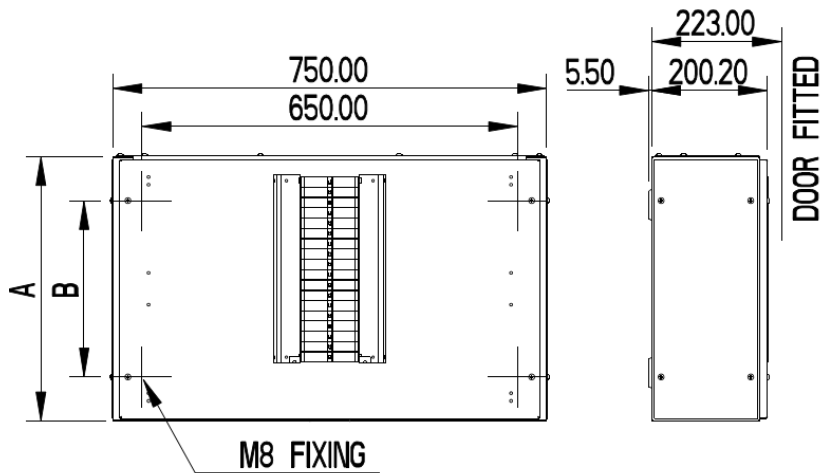

| Cat. No. | Weight (kg) |
|----------|-------------|
| LDS24 | 10 |

