


LOADSWITCH 160/200A SKELETON FUSE COMBINATION UNIT

Catalogue Number	SF3P160N	SF4P160	SF3P200N	SF4P200											
Main Features															
Relevant Standards	EN 60947-3														
Current Rating	160A	160A	200A	200A											
Poles	TP&N	4P	TP&N	4P											
Short Circuit Capacity (Fused)	80kA rms														
Rated voltage	415V AC														
Utilisation Category	AC23A														
Mechanical Endurance	8,000	8,000	8,000	8,000											
kW at 415V AC	90	90	110	110											
Weight	12kg														
Cables															
Terminal Type	M8 clearance hole														
Maximum Cable*	4C 150mm ²														
Maximum Cable Lug Palm Width (mm)	22														
Lug Fixing Screws Supplied	No														
Fuses															
Fuse type	BS88 ref A4 Fuse Links Offset Tag Type														
Fuse equivalents	Lawson/GEC - TCP/TFP; Bussmann - CEO/DEO														
Fuses Supplied	No														
Max Zs (5s disconnecting time, 240V, Lawson gG fuses BS88)	Rating (A)	6	10	16	20	25	32	40	50	63	80	100	125	160	200
	Zs (Ohms)	14	7.7	4.3	3.0	2.4	1.9	1.4	1.1	0.86	0.60	0.44	0.35	0.27	0.20
Accessories Cat No.s															
Solid Isolator Link (1 required per phase)	HFL200A														
Castell** lock mounting kit	SCLK														
Terminal Shroud	SFTSL														
Terminal barriers (Set of 3)	SFTB														
Handle Assembly	SHA2														
Shaft Extension for 270mm Deep Panel	SXT127														
Shaft Extension for 600mm Deep Panel	SXT160														

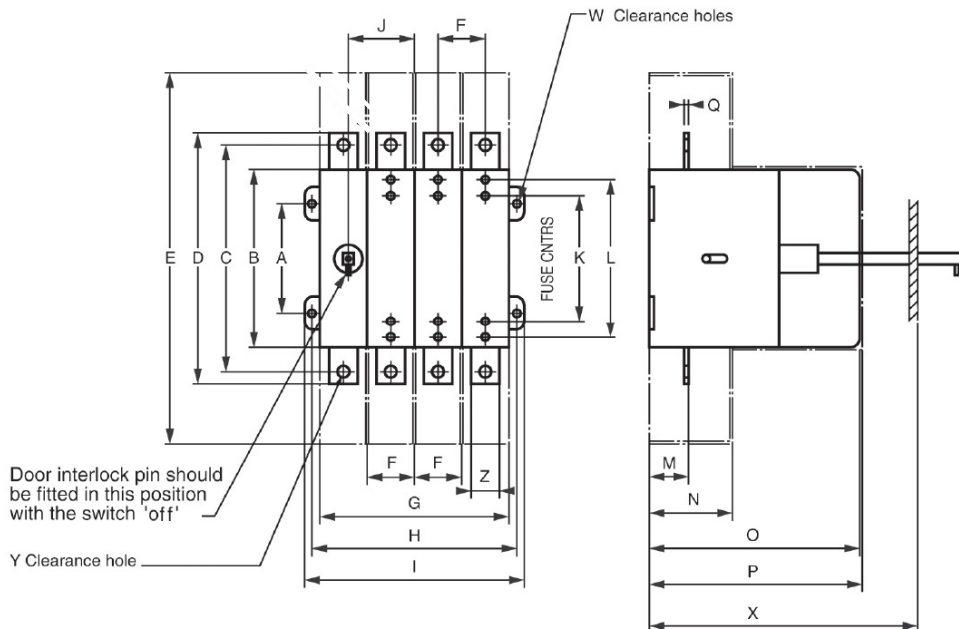

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	W	X	Y	Z
80	135	170	186	300	35	140	150	165	50	94	N/A	30	80	196	197	3	M5	220	M8	20

*These figures are for guidance only.

** Castell is a trademark of Castell Safety International Limited. NOTE: Standard symbol DS1, special symbols are available direct from Castell**. Quote reference: Castell FS2 – Spigot 9.5mm square x 22.5mm, 65° anti-clockwise to trap key.