

LOADLIMITER 63M RCBO

Main Features

- Meets the requirements of EN 61009
- 10kA Rated breaking capacity
- RCBO Type A
- Operational voltage 240V
- Maximum cable termination capacity is 16mm² flexible/ 25mm² rigid

CATALOGUE NUMBERS

Current Rating (A)	Sensitivity (mA)	B Type Product Code	C Type Product Code
6	30	MR1PTB0630A	MR1PTC0630A
10	30	MR1PTB1030A	MR1PTC1030A
16	30	MR1PTB1630A	MR1PTC1630A
20	30	MR1PTB2030A	MR1PTC2030A
32	30	MR1PTB3230A	MR1PTC3230A
40	30	MR1PTB4030A	MR1PTC4030A
6	100	-	MR1PTC06100A
10	100	-	MR1PTC10100A
16	100	-	MR1PTC16100A
20	100	-	MR1PTC20100A
32	100	-	MR1PTC32100A
40	100	-	MR1PTC40100A





MCB Accessories


Description	Product Code
MCB Dolly locking device	KDL
Padlock for dolly locking device	XPL

Technical data

Rated voltage	240V AC
Breaking capacity	10kA
Rated frequency	50/60Hz
Residual current off time	≤0.1s
Rated tripping current	30mA, 100mA
Tripping characteristics	B,C
Electrical endurance	4000
Mechanical endurance	10000
Terminals	16mm ² flexible/ 25mm ² rigid
Operating temperature	-25°C ... +40°C

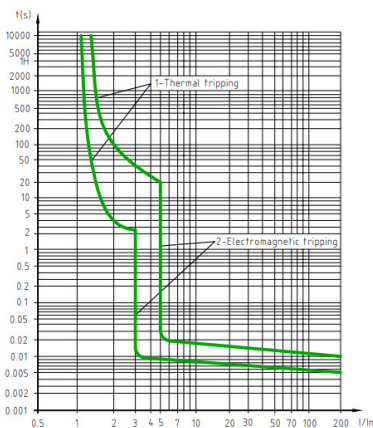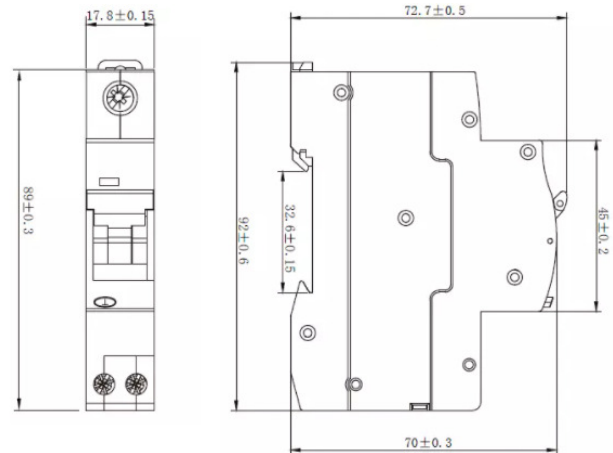

B type

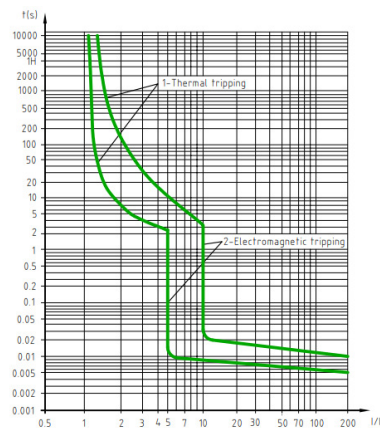

C type

