

LOADLIMITER 63M ULTRA A TYPE SP&N DISTRIBUTION BOARD

Main Features

- Suitable only for Loadlimiter 63M MCBs and RCBOs with catalogue items beginning with M. **Not suitable for use with K prefix MCBs and RCBOs**
- Meets the requirements of EN 61439-3
- Busbars are 125A rated
- Neutral and earth terminal for each single-pole way
- Available in 6 to 22 single-pole outgoing ways



CATALOGUE NUMBERS

Outgoing Single Pole Ways	Product Code
6	DA06M
9	DA09M
12	DA12M
15	DA15M
18	DA18M
22	DA22M

A TYPE DISTRIBUTION BOARD ACCESSORIES

Vertical Stacking Kits

Stacking kit for 270mm width	DAXSK08
Stacking Kit for 323mm width	DAXSK11
Stacking Kit for 377mm width	DAXSK14
Stacking Kit for 430mm width	DAXSK17
Stacking Kit for 484mm width	DAXSK20
Stacking Kit for 555mm width	DAXSK24

Earth Bar Kits

Earth Bar (12 x useable single pole ways)	DAXEB
Earth Bar isolation kit	DBXL

Door Lock Kits

Cylinder door lock	DBXCL
Padlock bracket kit	DBXPL

Busbar Terminal Blanks

Pack of 10 x busbar terminal blanks	DAXTP
-------------------------------------	-------

MCB Blanks

5 x MCB full module blanks for boards	DAXBPM
4 x Triple Pole MCB blanks and 12 x busbar terminal blanks	DBXBP
5 x Single Pole MCB blanks and 5 x busbar terminal blanks	DBXBM
5 x Half Pole MCB blanks	DBXBH

Direct Connection Kit


35mm Cable Termination	DBXD0
------------------------	-------

Spare Busbar Shroud

6 Way	BS5100/45
9 Way	BS5100/46
12 Way	BS5100/47
15 Way	BS5100/48
18 Way	BS5210/5
22 Way	BS5210/6

Fixing Kit


For Loadlimiter 63 SP&N Boards	T07223
--------------------------------	--------

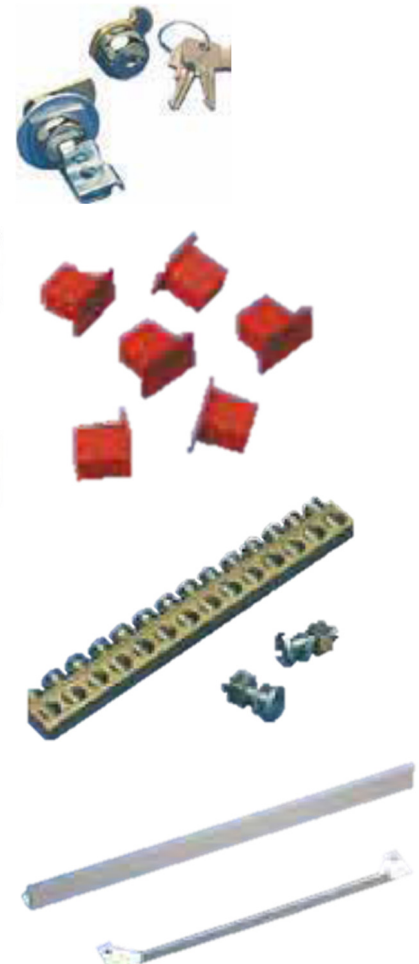

LOADLIMITER 63M ULTRA A TYPE SP&N DISTRIBUTION BOARD

Technical data

Enclosure mounting	Surface
Busbar Current Rating	125A
External IP Rating	IP4X
Construction Outer	Painted 0.8mm (min) thick zinc plated sheet steel.
Construction Inner	0.9mm (min) thick aluminium-zinc coated sheet steel.
Busbar material	Copper to BS EN 13599, CW004A - R250
Busbar support material	Flame retardant, glass filled Nylon
Paint	Polyester powder coat, low smoke/fume, depth 40/120 microns colour RAL7035

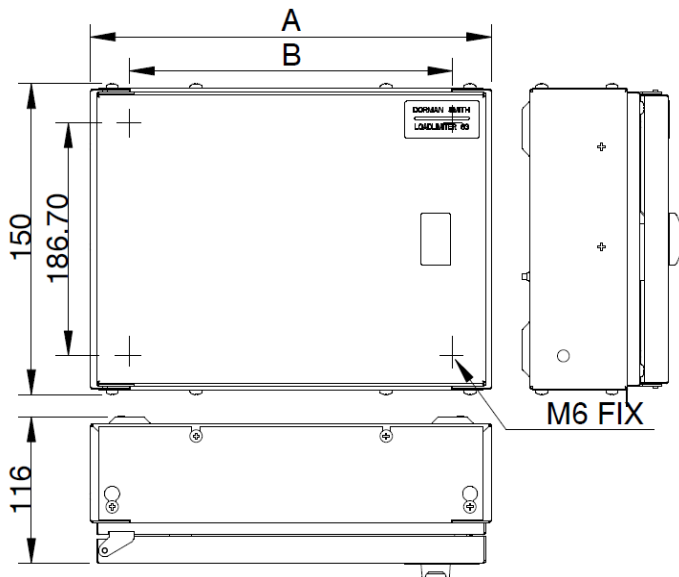

Cat. No.	Width A (mm)	Fixings B (mm)	Weight (kg)
DA06M	270	207	3.8
DA09M	323	260	4.3
DA12M	377	314	4.8
DA15M	430	367	5.3
DA18M	484	420	6
DA22M	555	492	7